

Automatic filler with diving nozzles

For all liquid, foamy and viscous products Standard filling range from 50 ml to 30 litres



- ▶ Upgradable filling machine according to speed requirements (from 2 to 12 heads)
- ▶ Flowmeter dosing technology : volumetric, mass or magnetic
- ▶ Quick format changeovers without tools
- ▶ Dosing accuracy and easy maintenance
- ▶ Industrial computer controlled by 15" color touch screen
- ▶ Flexible with a filling range from 50 ml to 30 l on the same machine

Agroalimentaire



Chimie-Détergence



Pharma - Cosmétique




Features

Flowmeter dosing technology assures flexibility of use from 50 ml up to 30 litres in standard conception.

Our diving nozzles managed by a servo motor enable a better filling quality (foam, fine particles ...).

Industrial PLC and 15" colour touch screen within stainless steel electric cabinet for management of:

- Machine cleaning in place
- Production formulae
- IP address for distance maintenance access
- Statistical production data by usb key.

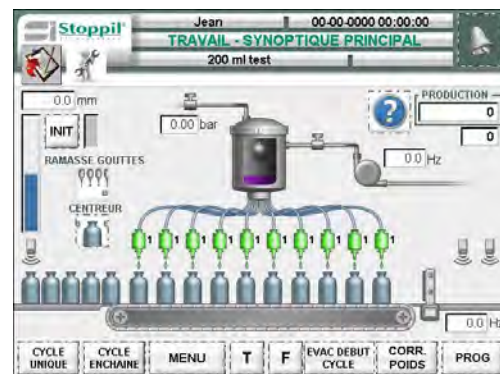

The different flowmeters :



Volumetric flowmeter
Accuracy +/- 0.5 %



Magnetic flowmeter
Accuracy +/- 0.3 %



Mass flowmeter Accuracy
+/- 0.2 %



Options :

- Pharma-cosmetic finishing
- Atex certified conception
- Corrosive products



Filling Screwing Labelling



Tél. : 33 (0) 1 60 31 55 55 — Fax : 33 (0) 1 60 31 55 50

Parc d'Activités du Gasset

2, rue des Terres-Fortes

F 77600 CHANTELOUP-EN-BRIE (France)

E. mail : stoppil@stoppil.fr — Site : <http://www.stoppil.fr>